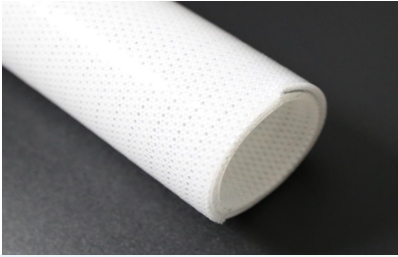


Inner layer fluororubber, outer layer silicone steel wire hose

Product images	Application	Characteristic	Structure
	▶ Transport of liquids	▶ Corrosion preventive	▶ Color: translucent
	▶ Extraction of air/steam	▶ Smooth inner wall	▶ Temperature: -40/+220 °C
	▶ CIP and SIP cleaning	▶ Odorless/Odorless	▶ Length can be customized
	▶ Food factory	▶ Good liquidity	
▶ Inside the hose: FDA certified fluororubber	▶ Medical equipment	▶ Good airtightness	
▶ Reinforcement: The inner layer is embedded with four layers of polyester fabric	▶ Cosmetics industry	▶ High temperature and steam resistance	
Inner layer embedded with 304 stainless steel wire		▶ FDA certification	
▶ Outer layer of hose: food grade silicone			

Part Number	Internal diameter mm	Outer diameter mm	Wall thickness mm	Weight kg/m	Burst pressure bar	Bending radius mm	Coil length m
ZS01-019-6	19	30	5.5	0.702	≥29	52	6
ZS01-025-6	25	36	5.5	0.870	≥25	68	6
ZS01-032-6	32	43	5.5	1.067	≥22	94	6
ZS01-038-6	38	49	5.5	1.236	≥20	112	6
ZS01-051-6	51	62	5.5	1.601	≥16	114	6
ZS01-063-6	63	74	5.5	1.938	≥13	181	6
ZS01-076-6	76	87	5.5	2.303	≥10	232	6
ZS01-089-6	89	100	5.5	2.668	≥8	303	6
ZS01-102-6	102	113	5.5	3.033	≥7	382	6

Note: * All technical parameters are approximate values and measured under conditions of 23 °C operating temperature and 50% ambient humidity. They may change accordingly based on actual operating conditions.

* We will periodically revise or adjust the relevant parameters. If we are unable to notify in a timely manner, please forgive us and refer to the data published on the website or company.